



YLI ELECTRONIC

Fail Safe Electric Bolt is for Auto-door



Model:YB-400





Parameters

Face Plate	205Lx35Wx41H(mm)
Strike	90Lx25Wx2H(mm)
Decorative Panel	215Lx40Wx0.5H(mm)
Bolt	16mmDIA, stainless steel 16mm throw
Signal Output	NC/COM
Time Delay	0/3/6/9sec
Voltage	12VDC
Current	Start 900mA, Standby 120mA
Fail Safe	Locked when energized
Suitable for	Wooden door, metal door, glass door
Weight	0.8kg


Dimensions

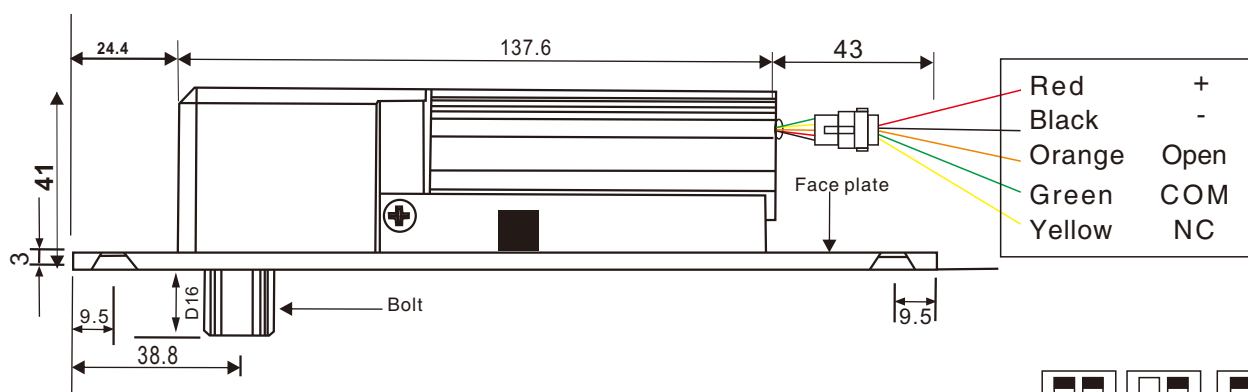

**AUTOLOCK TIME
DELAY SETTING**




BBK-300

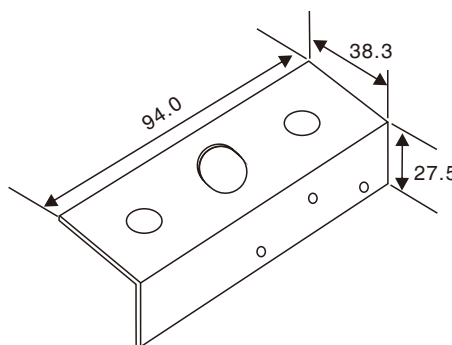


Installation


- 1 Fix the L bracket under the track

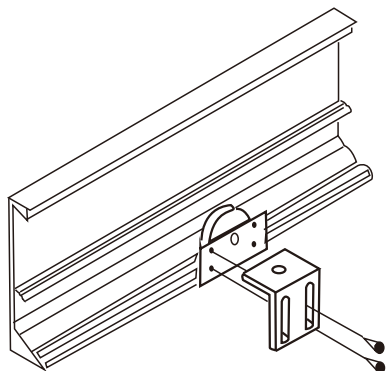


- 2 Fix the angle iron on the side face of track according to the faceplate length of electric bolt.

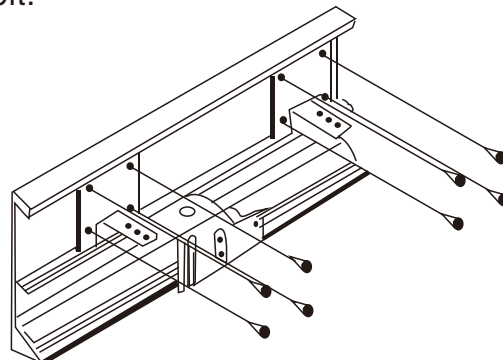

- 3 Fix the electric bolt on the angle iron

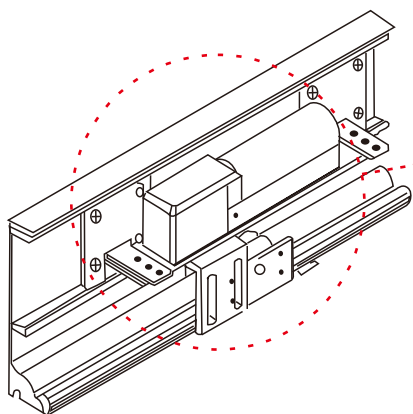

- 4 Schematic diagram

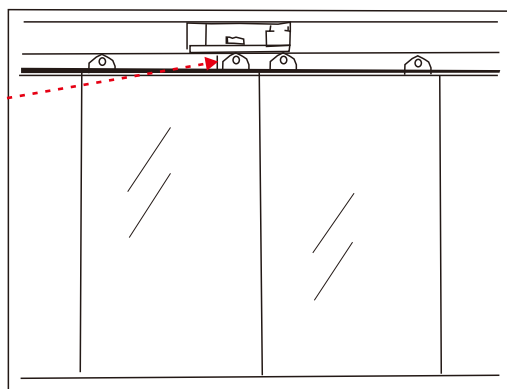

Wiring Diagram

