



YLI ELECTRONIC


Magnetic Lock (750kg)





Specification

Model	Size(unit:mm)	Voltage	Current	Holding Force	Signal Output	Time	Door
YM-750N	280Lx83.7Wx47.5H	12/24VDC	12V/500mA±10%(default) 24V/250mA±10%	750kg(1500Lbs)	No	No	Single Door
YM-750ND	560Lx83.7Wx47.5H	12/24VDC	12V/500mA±10%x2(default) 24V/250mA±10%x2	750kgx2(1500Lbsx2)	No	No	Double Door
YM-750N(LED)	280Lx83.7Wx47.5H	12/24VDC	12V/500mA±10%(default) 24V/250mA±10%	750kg(1500Lbs)	Yes	No	Single Door
YM-750ND(LED)	560Lx83.7Wx47.5H	12/24VDC	12V/500mA±10%x2(default) 24V/250mA±10%x2	750kgx2(1500Lbsx2)	Yes	No	Double Door
YM-750NT(LED)	280Lx83.7Wx47.5H	12/24VDC	12V/500mA±10%(default) 24V/250mA±10%	750kg(1500Lbs)	Yes	0/3/6/9sec.	Single Door
YM-750NTD(LED)	560Lx83.7Wx47.5H	12/24VDC	12V/500mA±10%x2(default) 24V/250mA±10%x2	750kgx2(1500Lbsx2)	Yes	0/3/6/9sec.	Double Door


Diagram(unit:mm)

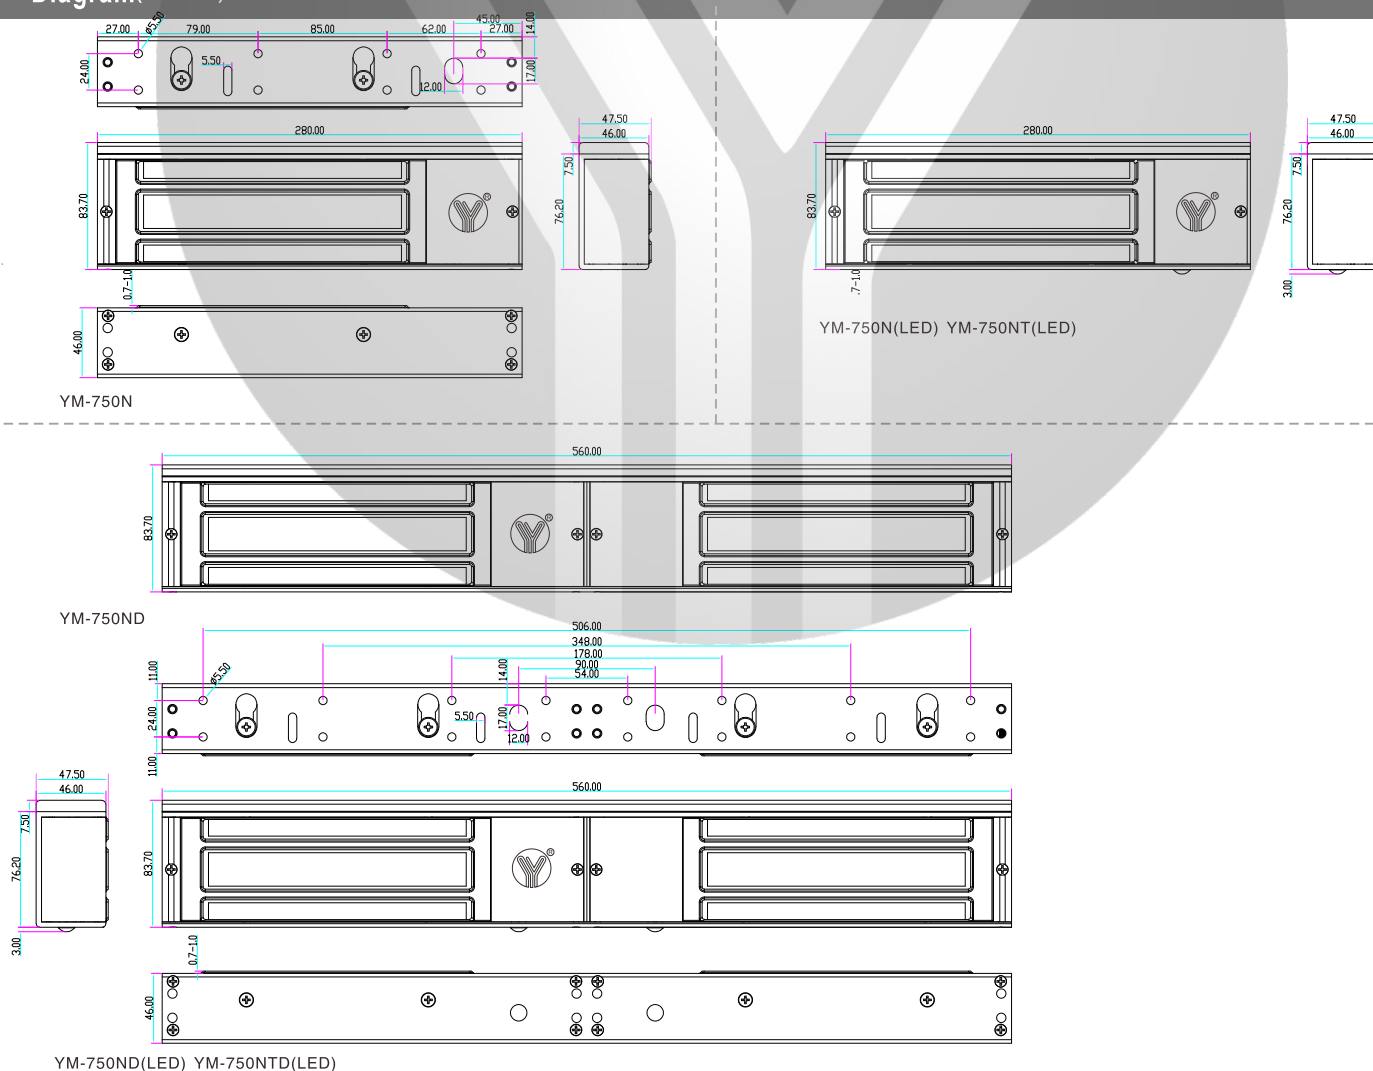


Installation



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.




Hollow Metal Door

Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door

Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door

Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm


1200LBS: 46mm

Bracket Installation

Different brackets are available for different types of doors. For example, narrow door, frameless glass door and inward opening door.


L Bracket-For outward opening door

When the door frame thickness is less than 42mm, L bracket is needed.




ZL Bracket-For inward opening door


For inward opening door, ZL bracket is needed.



Installation Drawing

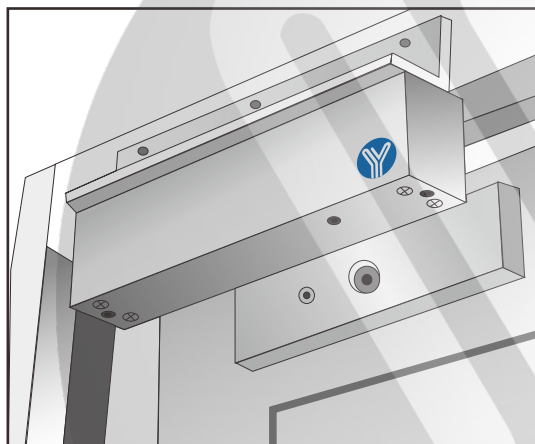

Demonstration of L Bracket

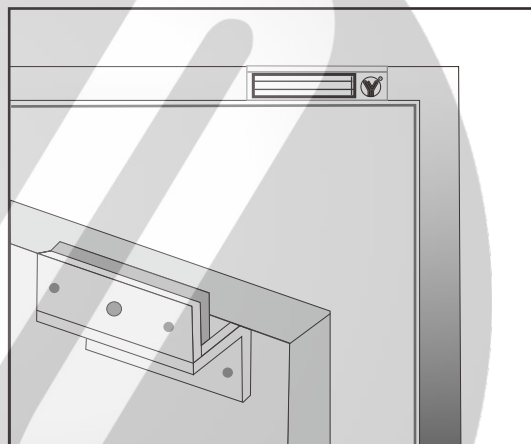

Demonstration of ZL Bracket

Circuit Board Diagram

A. 12VDC Input:

Required power 0.42Amp(Minimum).

Connect the positive(+)lead from a 12VDC power source to V +.

Connect the ground(-)lead from a 12VDC power source to V -.

Check jumper for 12 VDC operation.


B. 24VDC Input:

Required power 0.21Amp(Minimum).


Connect the positive(+)lead from a 24VDC power source to V +.

Connect the ground(-)lead from a 24VDC power source to V -.


Check jumper for 24 VDC operation.

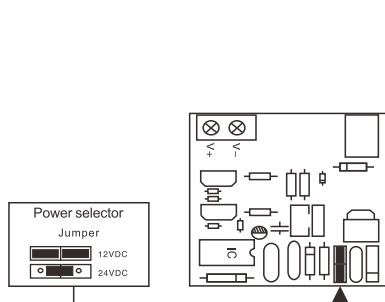

YM-750N, YM-750ND

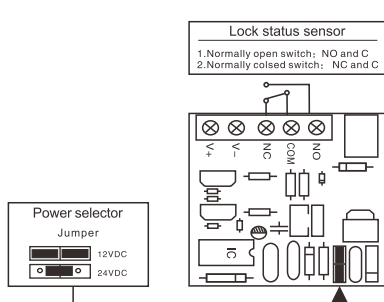

YM-750N(LED), YM-750ND(LED)

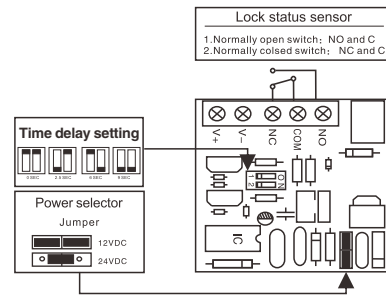

YM-750NT(LED), YM-750NTD(LED)

