



YLI ELECTRONIC

Fail Safe(Secure) Sturdiness Electric Bolt W/Narrow Panel


Model:YB-500A/B




Parameters

Face Plate	192Lx25Wx27H(mm)
Strike	100Lx25Wx3H(mm)
Decorative Panel	215Lx40Wx0.5H(mm)
Bolt	16mmDIA, stainless steel 16mm throw
Signal Output	NC/COM(YB-500A), NO/COM(YB-500B)
Time Delay	0/3/6/9 sec
Voltage	12VDC
Current	Start 960mA, Standby 130mA
Fail Safe	Fail Safe(YB-500A), Fail Secure(YB-500B)
Suitable for	Wooden door, metal door
Weight	0.74kg

Dimensions

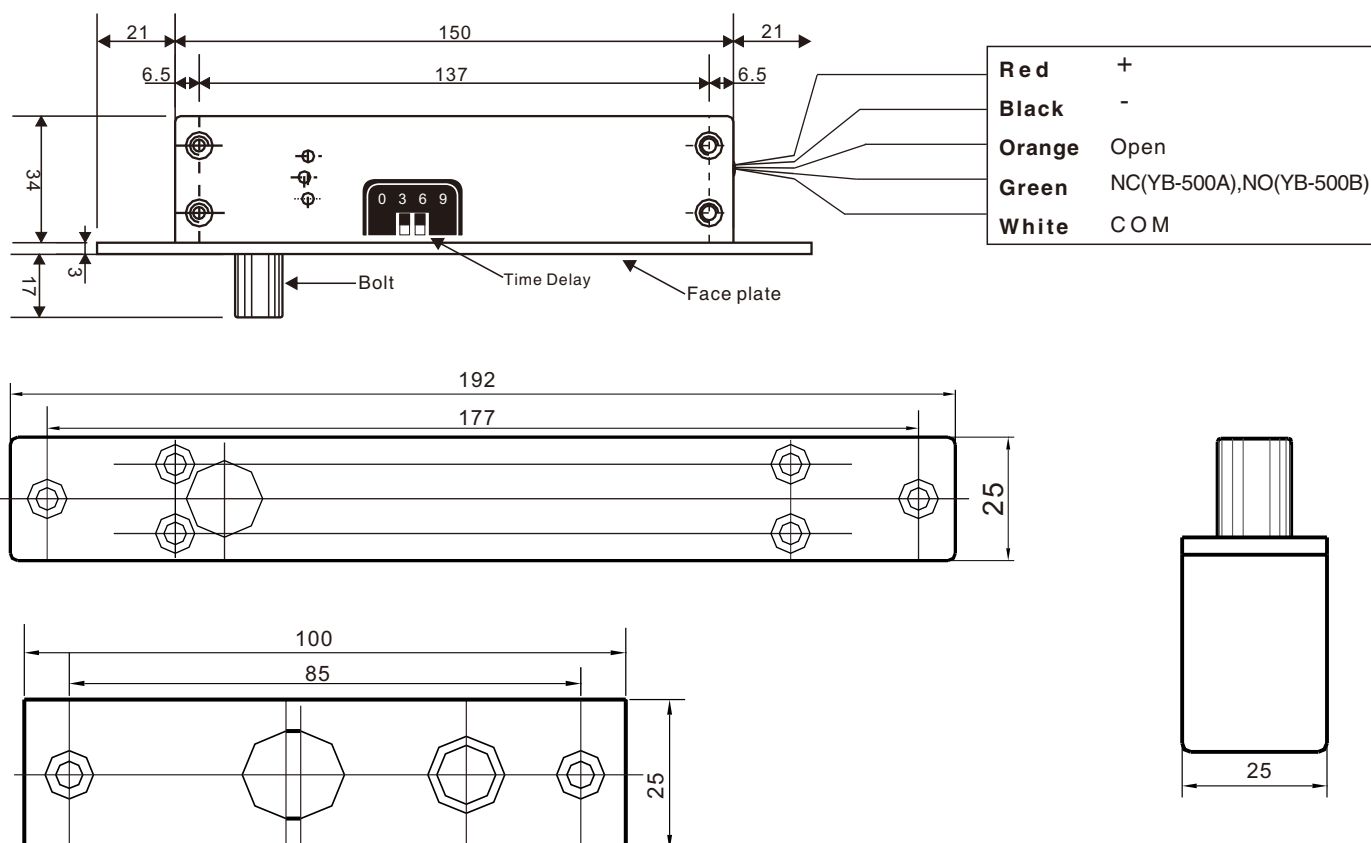

Installation

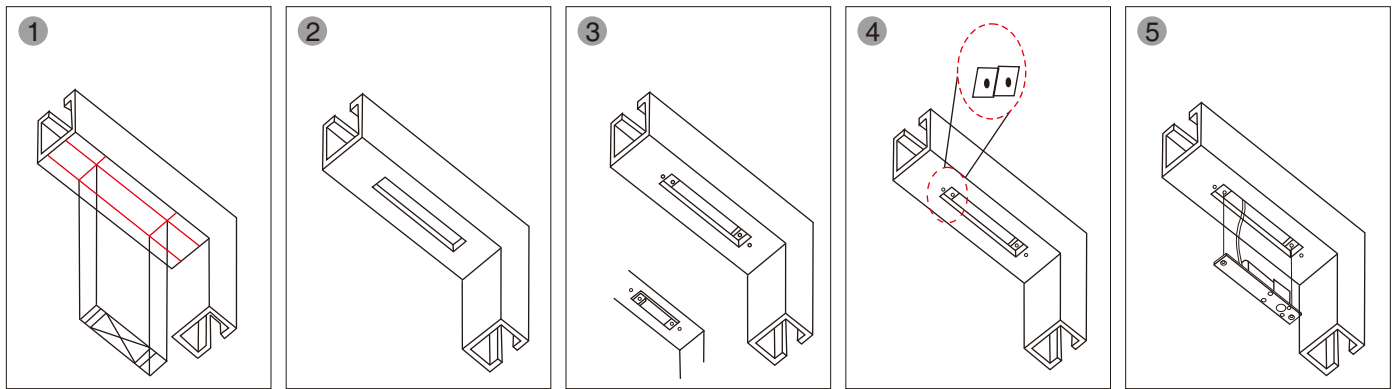

Place lock body template to match with door frame center line

Cut hole



Fix mounting plate (For hollow metal frame)

Connect wires

Mount lock body on the door frame and test

Installation Schematic

Suitable for 10-15mm glass door, BBK-600/601/602 for Frameless Glass Door.

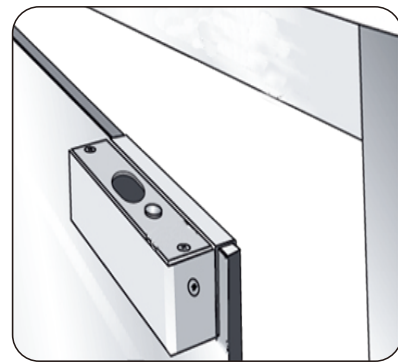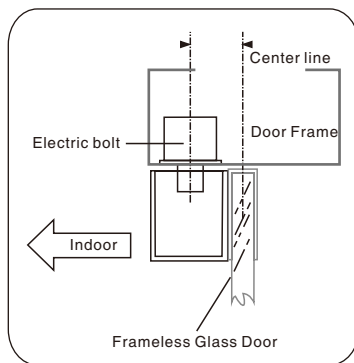

Wiring Diagram

