



YLI ELECTRONIC

Fail Safe Electric Bolt W/LED Signal & Time




Model:YB-200


Parameters

Face Plate	205Lx35Wx41H(mm)
Strike	90Lx25Wx2H(mm)
Decorative Panel	215Lx40Wx0.5H(mm)
Bolt	16mmDIA, stainless steel 16mm throw
Signal Output	NC/COM
Protective Design	0/3/6/9 sec
Voltage	12VDC
Current	Start 1000mA, Standby 100mA
Fail Safe	Locked when energized
Suitable for	Woodeng door, metal door, glass door
Weight	0.7kg


Dimensions

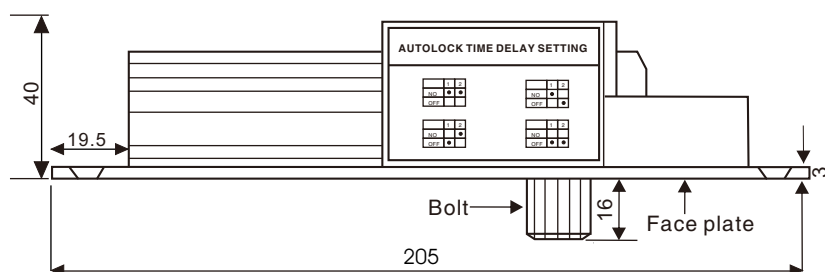


Red	+
Black	-
White	NC
White	COM

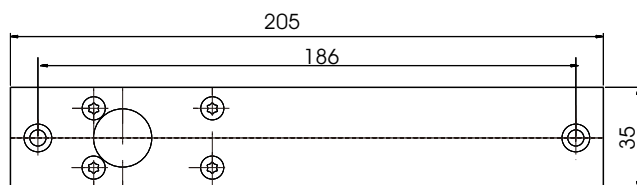


Face plate

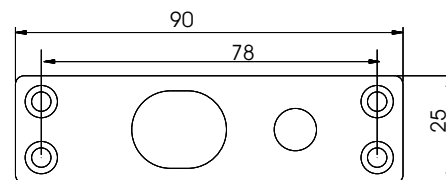

Strike

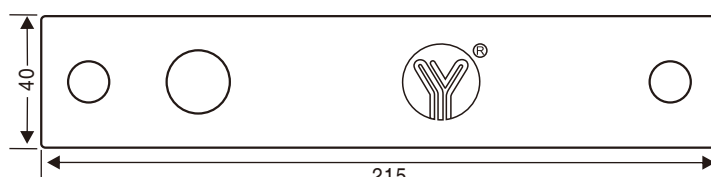


Decorative Panel

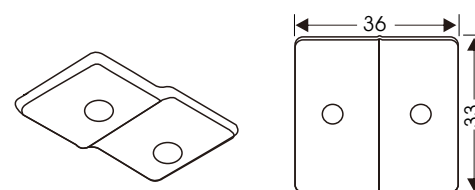

Extended plate

Installation

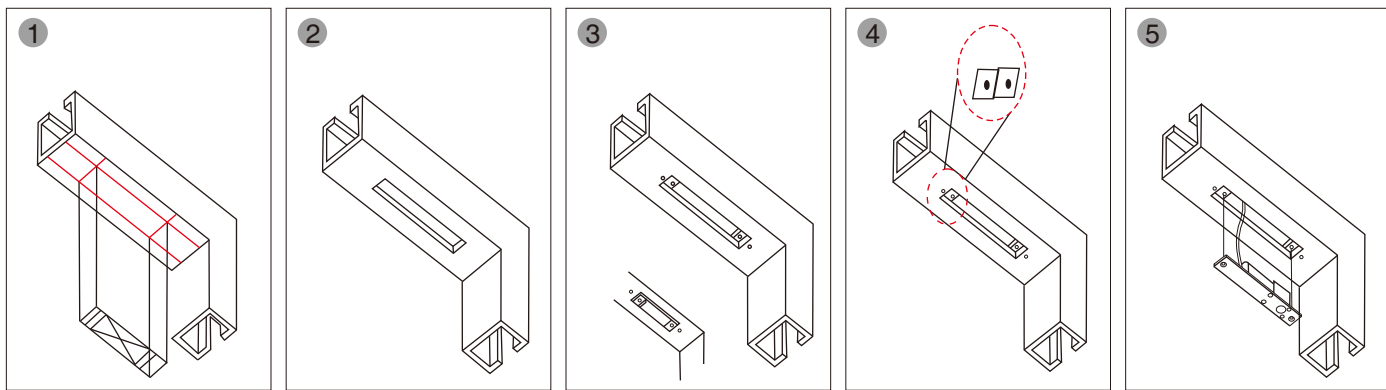

Place lock body template to match with door frame center line

Cut hole

Fix mounting plate (For hollow metal frame)


Connect wires

Mount lock body on the door frame and test

Installation Schematic


Frameless Glass Door

Suitable for 10-15mm glass door, BBK-600/601/602 for Frameless Glass Door.

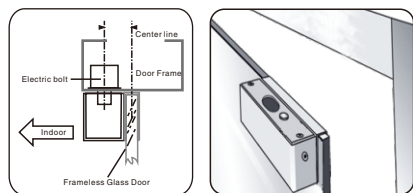


Fully Frameless Glass Door

BBK-700 for Fully Frameless Glass Door (need order)

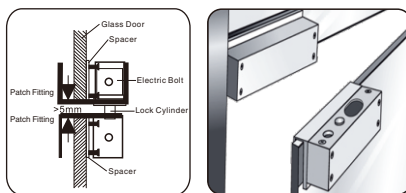

Aluminium Bracket for Narrow Door

BBK-500 for Narrow Door (need order)

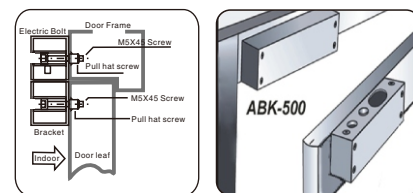

Wiring Diagram

