



YLI ELECTRONIC




Infrared Sensor Exit Button

Model: ISK-841A/B/C/D(LED)

Specification

- Size: 90Lx35Wx37.7H(mm) (ISK-841A(LED))
86Lx50Wx37.7H(mm) (ISK-841B(LED))
86Lx86Wx25.7H(mm) (ISK-841C(LED))
114Lx70Wx25.7H(mm) (ISK-841D(LED))
- Input : DC12V
- Current: Standby 40mA, Operation: 70mA
- Contact rating: 1A@30VDC
- Output contact: NO\NC\COM
- Detection range: 4-12cm(Adjustable)
- Time delay: 1~25s(Adjustable)
- Standard Structure: 304 stainless steel panel with wiredrawing finish
- Mechanical Life: 1000,000 tests
- LED Indicator:
 - Red LED indicator: Power ON(standby)
 - Green LED indicator: Power ON(sensation)
- Operating temp: -20℃ ~ +50℃ (14-131F)
- Suitable humidity: 0-95% (relative humidity)
- Suitable for door: Hollow Door
- Weight: 0.18kg/0.18kg/0.2kg/0.2kg

Installation & Size

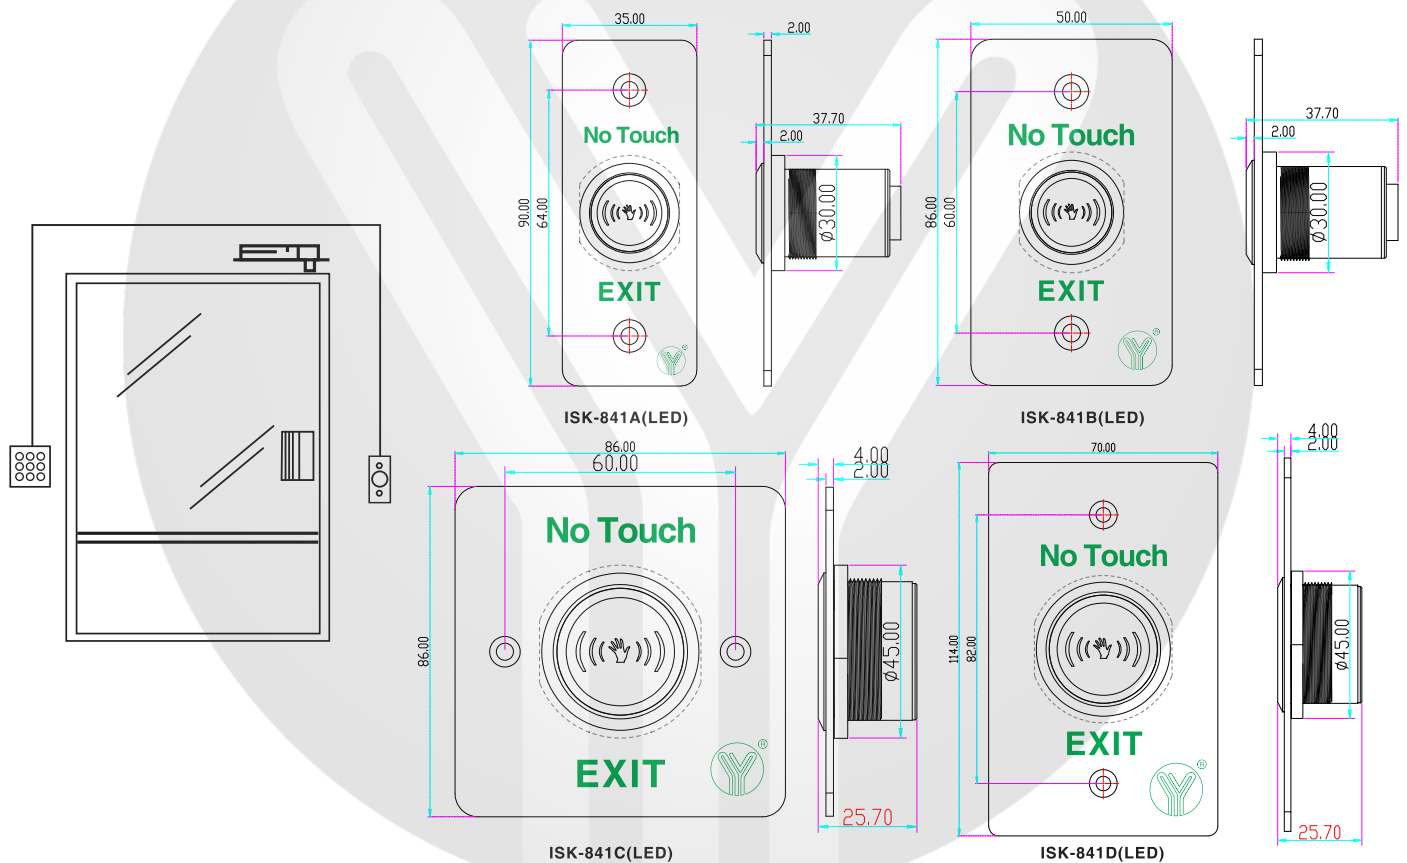


Wiring Diagram


Detection range: 4-12cm(Adjustable)

VR1 illustration:

- ⊕ The Farthest distance
- ⊕ The Nearest distance



ISK-841A/B(LED)



ISK-841C/D(LED)

Time delay: 1S~25S

VR2 illustration:

- ⊕ Min.time delay
- ⊕ Max.time delay

