



YLI ELECTRONIC

Waterproof Infrared Sensor Exit Button


Model: ISK-842A/B(LED)-WP



Specification

- Size: 76Lx91Wx46H(mm) (A)
78Lx91.5Wx61H(mm) (B)
- Input : 12~24VDC
- Current: $\leq 70\text{mA}$
- Contact rating: 1A 30VDC
- Output contact: NO\NC\COM
- Detection range: 10cm($\pm 20\%$)
- Waterproof Level: IP-67
- Structure: Zinc alloy material black paint treatment
- Mechanical life: 1000,000 tests
- LED Status: Red: Standby Green : Operation
- Operating temp: $-20^{\circ}\text{C} \sim +50^{\circ}\text{C}$ (14-131F)
- Suitable humidity: 0-95% (relative humidity)
- Feature: Surface mount/ Mortise mount
- Weight: 0.5kg

Installation & Size

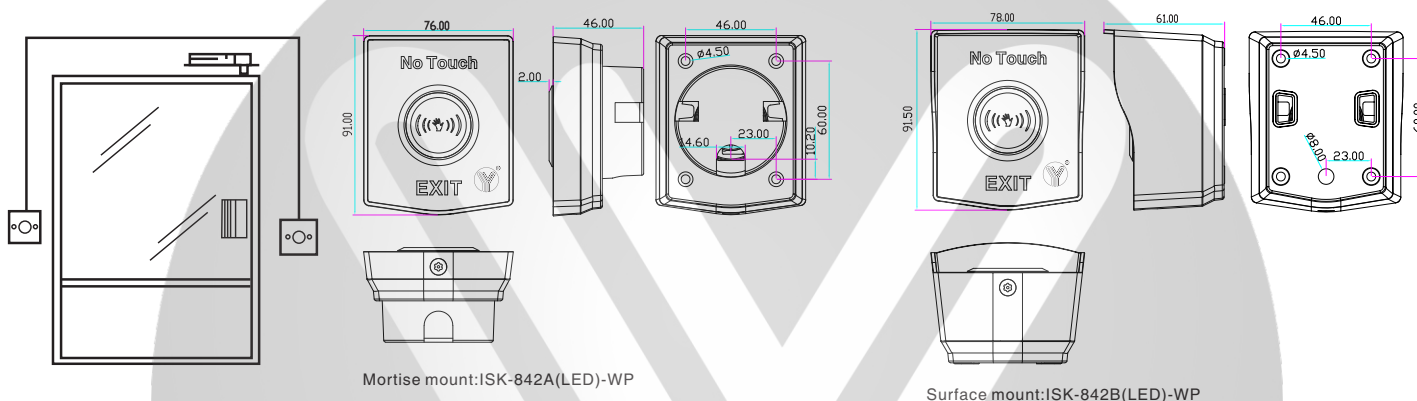

Assembly steps&Removing steps

1. Fix the panel slot on the bottom buckle.

2. Fix the the panel and back box together.

1. Remove the anti-theft screw with a wrench

2. The panel of the switch from the bottom

Assembly steps

3. Fix the panel with anti-theft screw.

Removing steps

Wiring Diagram

