



YLI ELECTRONIC


Fail Safe(Secure)Electric Bolt W/Signal, Time & Open Wire Model:YB-700A/B



Parameters

Lock Body	215Lx35Wx38H(mm)
Magnetic Plate	100Lx25Wx2.5H(mm)
Bolt	16(prolongation)*16(diameter)(mm)
Signal Output	Lock signal:NO/NC/COM Door signal:NO/COM
Time Delay	0/3/6/9sec
Voltage	12VDC $\pm$ 10%
Current	Start 1000mA,Standby 90mA
Feature	Fail Safe(YB-700A),Fail Secure(YB-700B)
LED	Light on indicates locked, light off indicates unlocked
Detection Distance	Within 8mm
Suitable for	Wooden door,meta doorl,fireproof door,glass door
Material	304 stainless steel, wire draw finishing
Weight	1.0kg

Dimensions

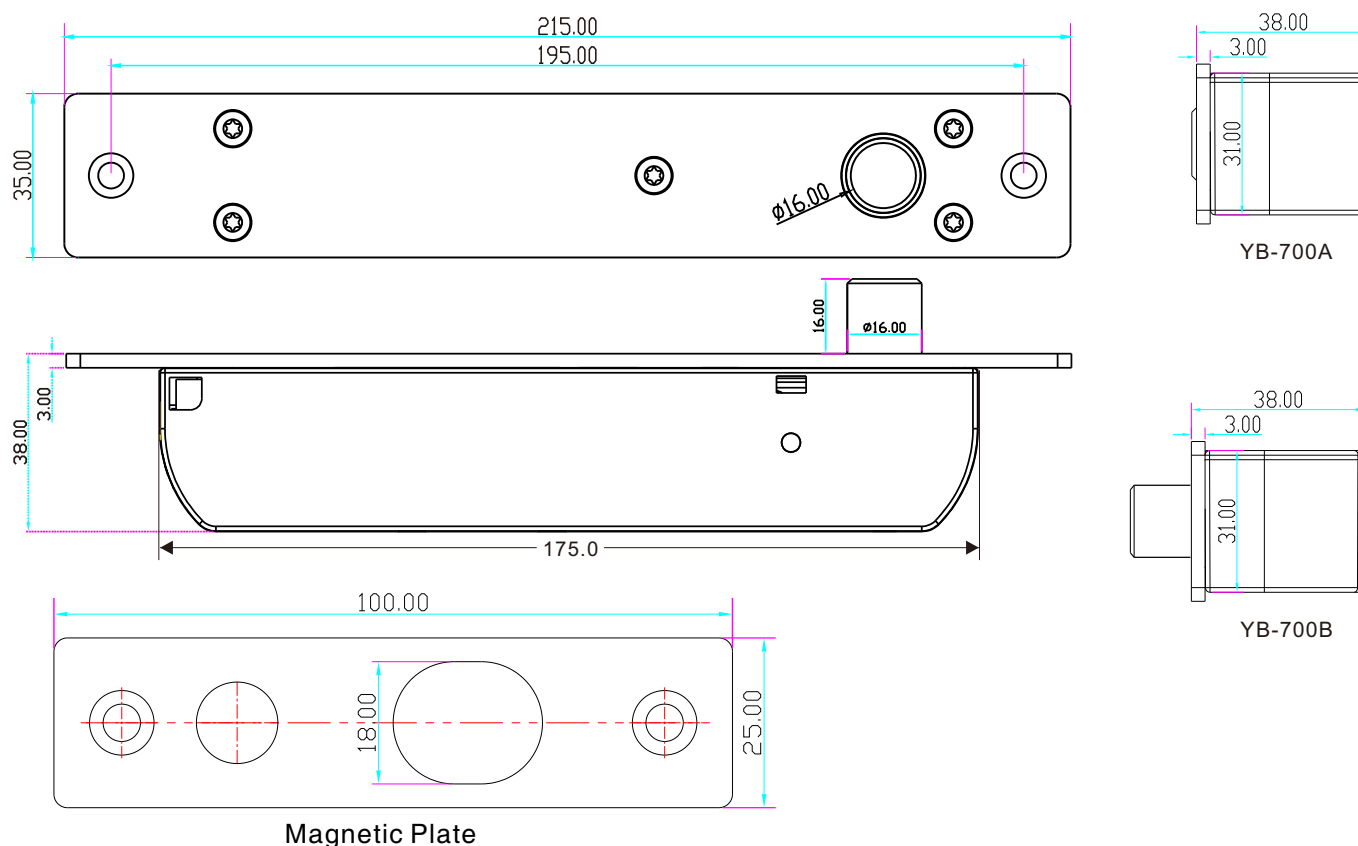

Time Delay

Adjust the delay time for locking automatically 0/3/6/9 secs.



0.0 SEC



6.0 SEC




3.0 SEC




9.0 SEC


Wiring Diagram

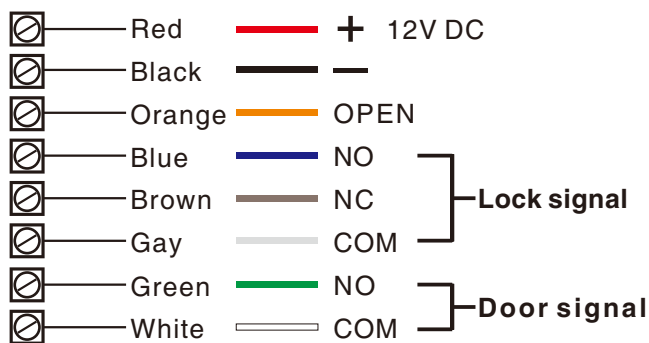


Installation Steps

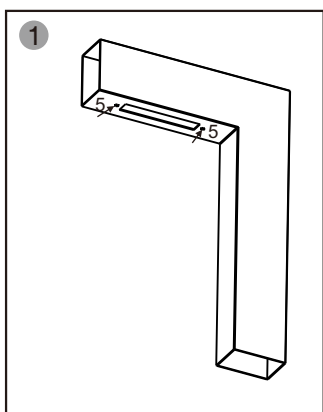


1 Incise the location of face plate and magnetic plate in the door leaf and door frame according to the mark of lore size

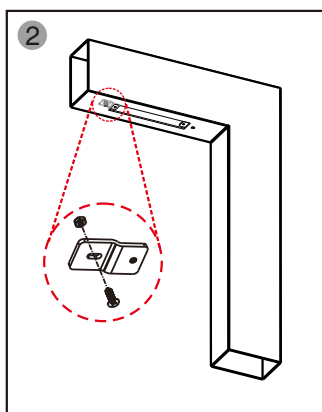

2 Mount extended slice

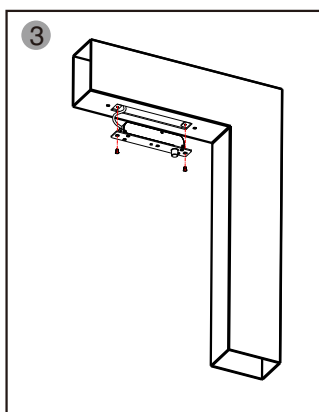

3 Connect power supply line and test

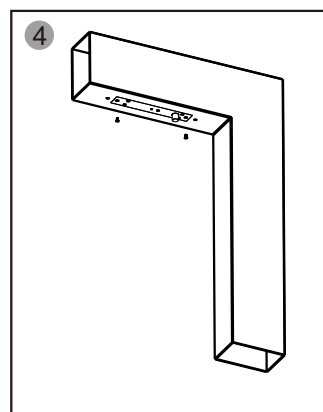

4 Tighten the screws

Installation Schematic

