



Electric Strike Size	250Lx30Wx48H(mm)
Dimensions of Strike Plate	170Lx30Wx3H(mm)
Voltage	12 ~ 28VDC
Current	≤ 500mA
Signal Output	Door Status Signal Output(NO/COM);Lock Signal(NO/NC/COM)
Time Delay	0/3/6/9sec
LED	Red shows locked ;Green shows unlocked
Detection Distance	8mm
Suitable for	metal door, glass door
Material	304 stainless steel, wire draw finishing
Weight	1 kg

Wiring Diagram

Adjust the delay time for locking auto matically
0/3/6/9 secs.



0.0 SEC




6.0 SEC




3.0 SEC



9.0 SEC

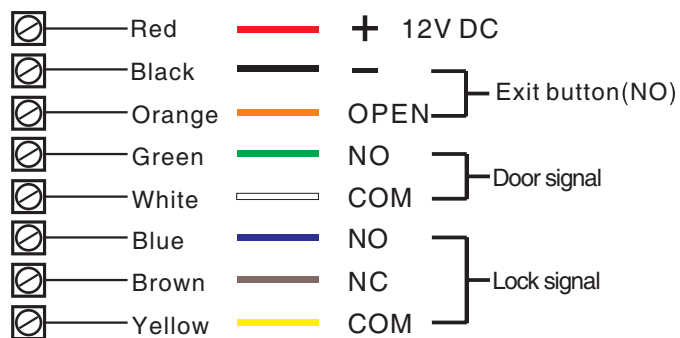

Installation

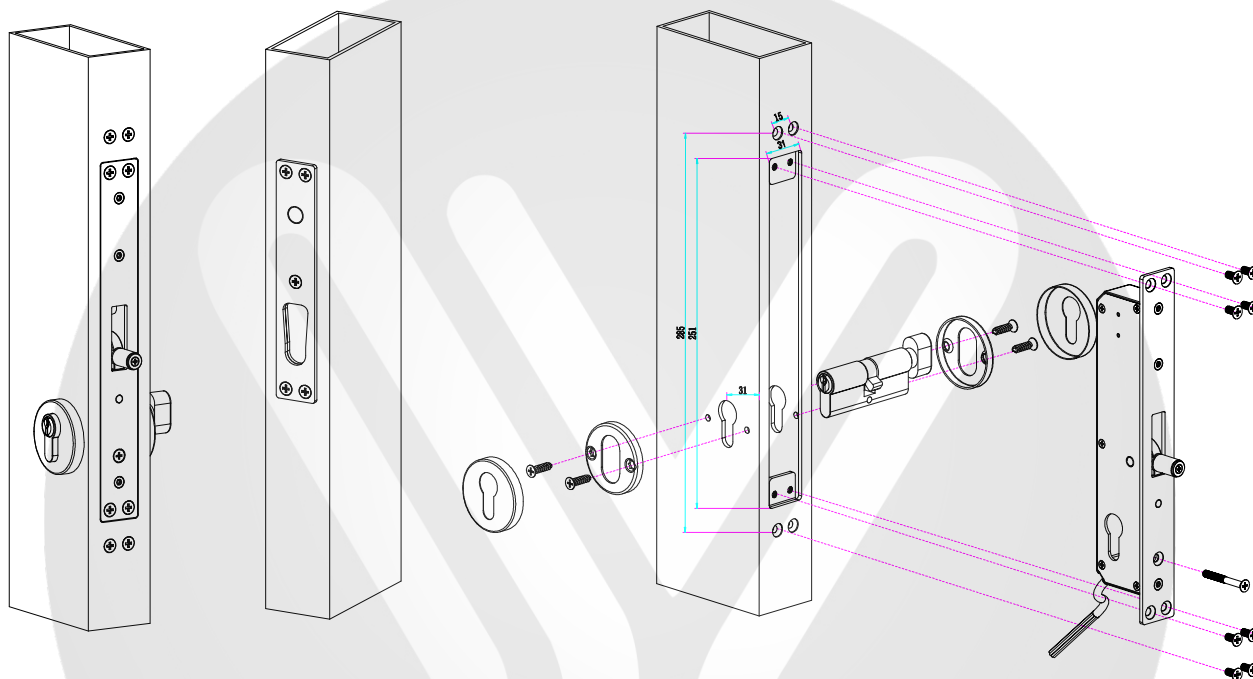


Side installation for hollow door

Installation Schematic



Installation on top

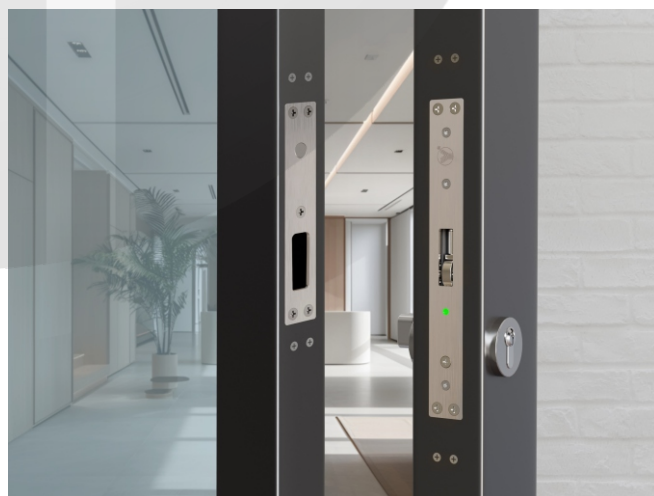

Side installation