



YLI ELECTRONIC




European Standard Heavy Duty Electric Strike W/Signal

Model: YS-137-S(SS304)

Specification

Dimension	174.5L*44.3W*26.8H(mm)
Voltage	DC12V (DC24V Customized)
Current	12V/320mA±20%; 24V/200mA±20%
Bolt Material	Hardend 304 Stainless Steel
Cover finish	304 Stainless Steel
Feature	Fail Safe / Fail Secure adjustable
Signal Output	Lock Signal with NO/NC/COM Contacts
Bolt Signal	With NO/NC/COM contacts
Durable design	Mechanical test: 500, 000 times
Suitable for	European Standard Mechanical Lock
Door Swing	90 degrees
Weight	0.5kg

Diagram(unit:mm)

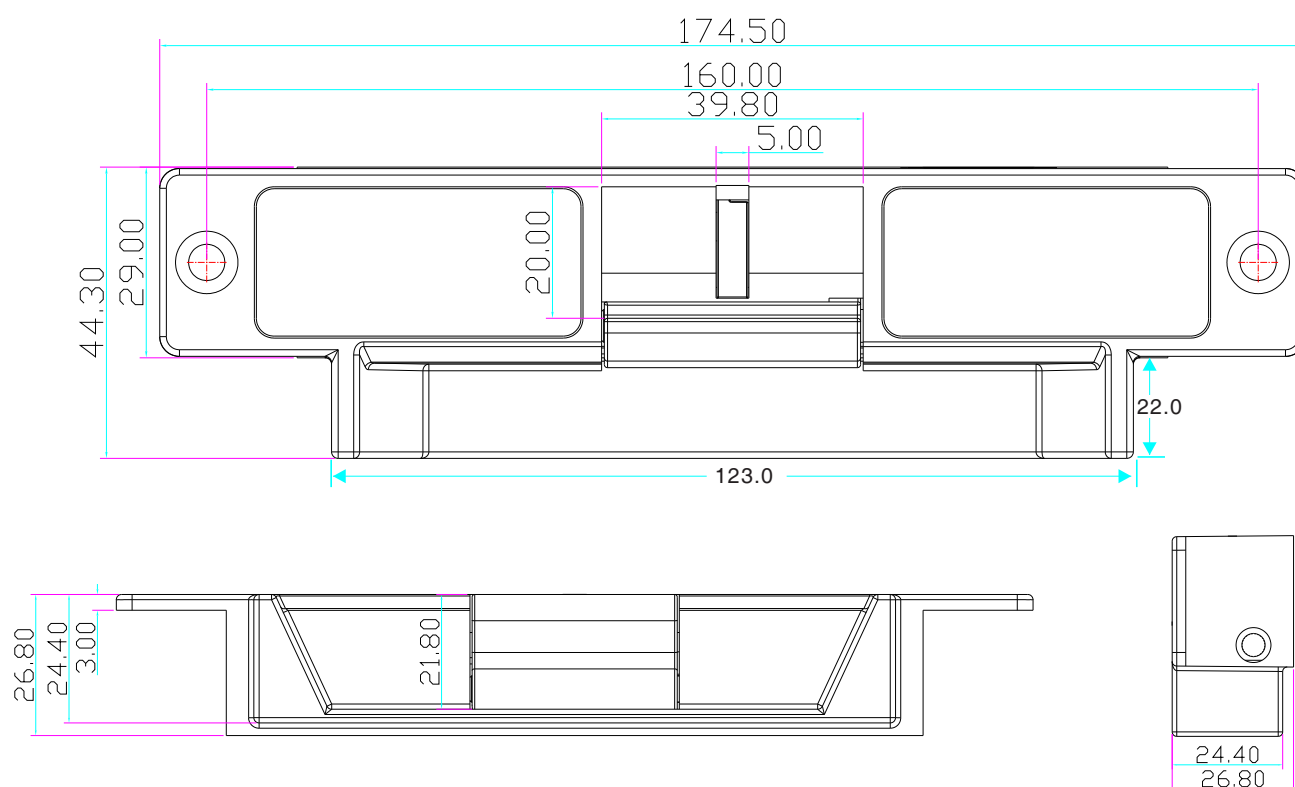

Signal Output

N.C. contact or access relay for fail safe setting.
N.O. contact or access relay for fail secure setting.



Green: NO
White: COM
Yellow: NC

Door Status

N.C. contact output : open status
N.O. contact output : closed status


Blue: NO
Grey: COM
Orange: NC

Locked or Unlocked Status

N.O. contact output : unlocked status
N.C. contact output : locked status


Red: +
Black: -

Adjustment

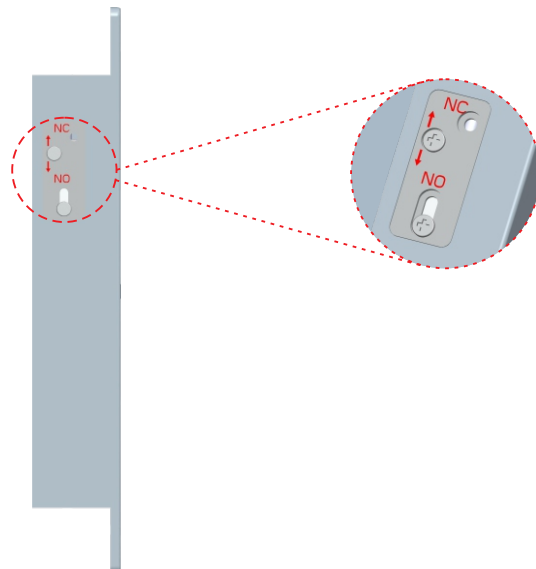

You can set the operation mode of Fail Safe or Fail Secure.
Loose the screw and tighten it in the other hole.
Fail Safe(NC): When power off, the door is in the open status.
Fail Secure(NO): When power off, the door is in the closed status.

Installation Diagram

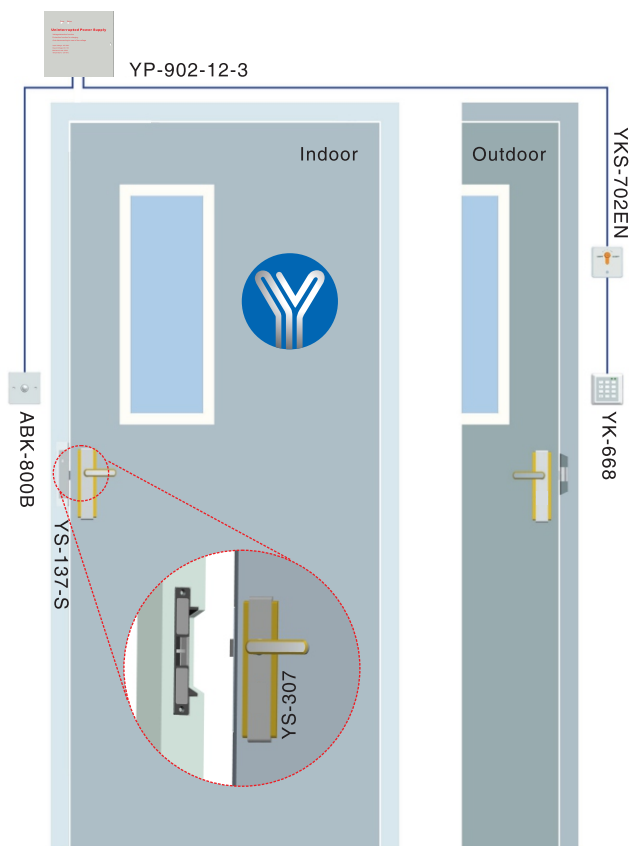

Overall Dimensions

