



YLI ELECTRONIC

Auto-door switch for disabled

Model: YAD-134BT




3 Using process

- Dedicated for washroom of disabled-person, large-panel designed with voice prompts.
- Normal standby, the exterior panel displays "Vacant" .
- Press the open button of exterior panel, door open with voice prompts. Internal panel displays unlocked, warning to press the lock button. After entering the washroom, press the lock button of inner panel, door close with voice prompt. At the time, door can not be open until the user press open button of inner panel. And door close in 5s,15s,15minutes according to the setting.
- When user have trouble and can not operate the call panel. Start the EMERGENCY function, door can be open forcibly by outsider.
- Start the LOCK function to lock the system, when the staff after work, so that the door is in a safety closure state, to stop the use of external.

1 Safety instructions

! Thanks so much for your purchasing, please read this instruction before reading.

2 Product overview

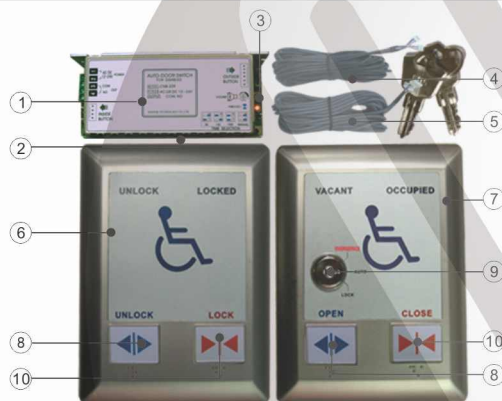


- | | |
|--------------------------|-----------------|
| ① Main controller | ② Voice speaker |
| ③ Volume adjustment | ④ 6P line |
| ⑤ 7P line | ⑥ Inner panel |
| ⑦ Exterior Panel | ⑧ Open button |
| ⑨ Function switch button | ⑩ Close button |


4 Component parts of products



The wiring diagram of input and output

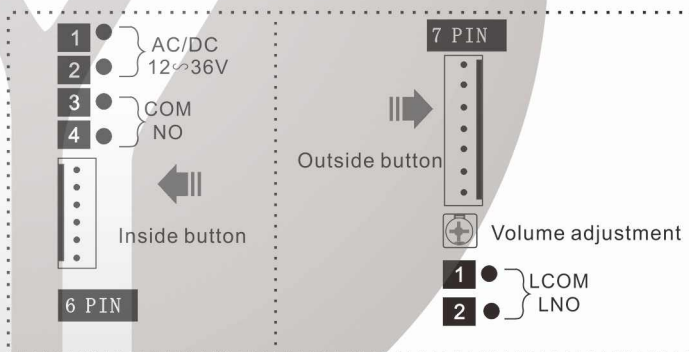

3 Function

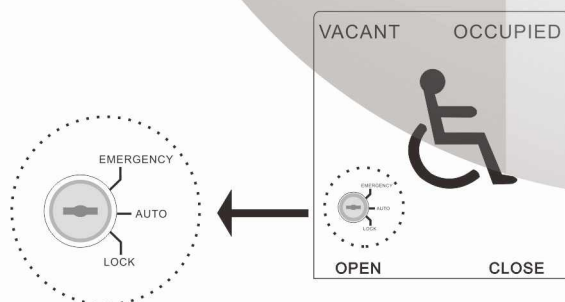

- Emergency :** When user have trouble and can not operate the call panel,start EMERGENCY function,door open forcibly by outsider.
- Automatic:**Start AUTO function,call panel work normally,people can get out and in.
- Lock:** Inner and exterior panel lose effectiveness, control system and door are locked. Can not be used normally.

! Notes: Key should be returned to the AUTO function after EMERGENCY or Lock function be used.

6 Composition and method of dial settings

Composition	
LIST	Quantity
Audio (Built-in)	1EA
Controller	1EA
Exterior panel	1EA
Inner panel	1EA
Key	2 EA
7P Line	1 EA
6P Line	1 EA
Screw4×18	8 EA

Setting Method	
ON	TIME
1 2	5seconds
1 2	15secods
1 2	15minute
1 2	By hand

7 Technical specifications and parameters

Operating voltage:	AC/DC 12~36V
Switch Controller:	142(L)x58(W)x40(H)mm
Panel Size:	160(L)x120(W)x15(H)mm